

Equipped with Priority function, Chime function, and 2 Zone selector switches, the A-1806 PA Amplifier of 60 W is designed to suit the following PA system applications: paging announcements, intercommunications, BGM, and broadcasting in schools, offices, and shops. It's power remote control function, provided especially for use in conjunction with the P-1812 (optional), will turn ON or OFF the P-1812's power.




Article number:A-1806 ER
Alternative products: A-1803, A-1812


Specifications

| | |
|-------------------------|---|
| Power source | 220 - 230 V AC, 50 / 60 Hz |
| Power source | 220 - 230 V AC, 50 / 60 Hz |
| Frequency response | 50 Hz - 20 kHz (± 3 dB) |
| Control input | TEL: No-voltage make contact input, open voltage: 24 V DC, short-circuit: 5 mA or less, M3 screw terminal EMERGENCY: No-voltage make contact input, open voltage: 24 V DC, short-circuit: 10 mA or less, M3 screw terminal |
| Frequency response | 50 Hz - 20 kHz (± 3 dB) |
| Distortion | < 2 % (at 1 kHz, rated power) |
| S/N ratio | 100 dB (MIC: > 60 dB; AUX : > 76 dB; Tel: > 90 dB, EMERGENCY: > 96 dB) |
| Number of channels | 1 |
| Connectable microphones | 3 |
| S/N ratio | 100 dB (MIC: > 60 dB; AUX : > 76 dB; Tel: > 90 dB, EMERGENCY: > 96 dB) |
| Inputs | MIC 1: -60 dBV, 600 Ω , balanced, combined XLR phone jack or 5p DIN socket MIC 2 & MIC 3: -60 dBV, 600 Ω , balanced, combined XLR phone jack AUX 1-2: -20 dBV, 10 k Ω , unbal. RCA AUX 3: -20 dBV, 10 k Ω , unbal. combined XLR phone jack |
| Control input | TEL: No-voltage make contact input, open voltage: 24 V DC, short-circuit: 5 mA or less, M3 screw terminal EMERGENCY: No-voltage make contact input, open voltage: 24 V DC, short-circuit: 10 mA or less, M3 screw terminal |
| Outputs | REC: 0 dBV, 600 Ω , unbalanced, RCA pin jack SPEAKER: 100 V (167 Ω), 4 - 16 Ω |
| Distortion | < 2 % (at 1 kHz, rated power) |
| Finish | ABS resin, Steel plate, hairline, black, |


Appearance

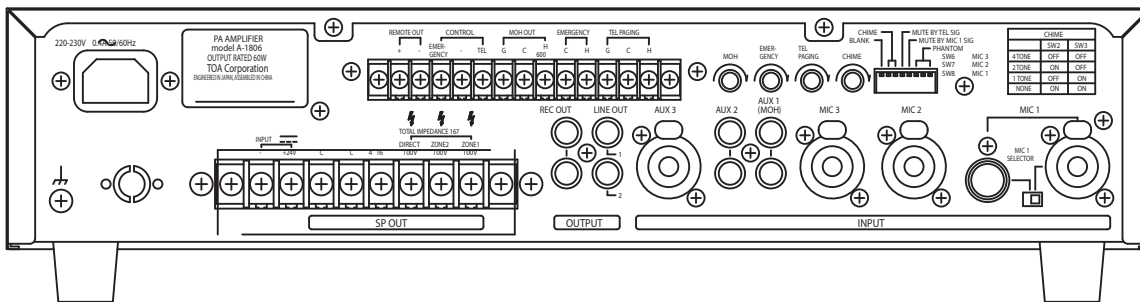

Rear View

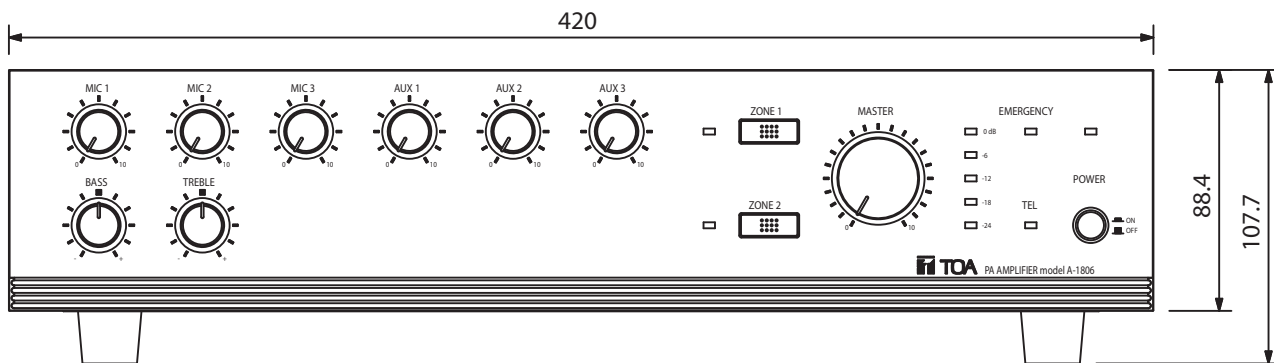

Front View

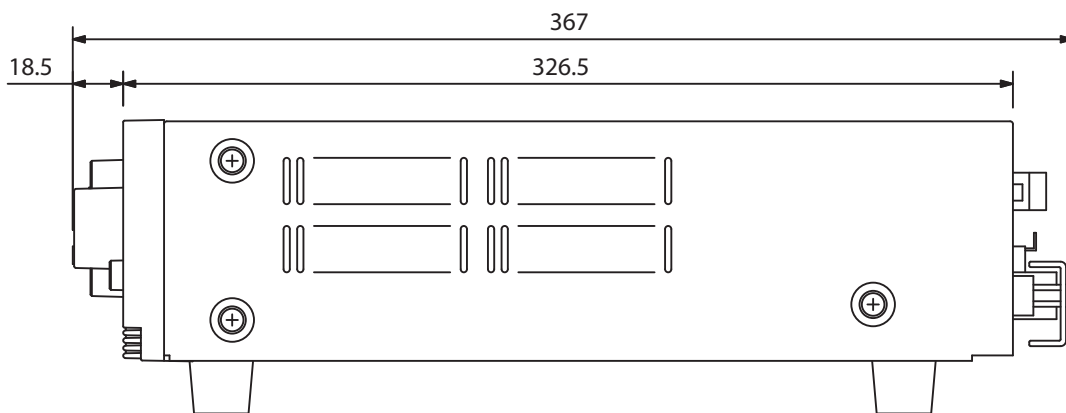

Side View

UNIT:mm SCALE:1/3