

The BS-1034 is a wall mount speaker that can be installed easily on the wall with help of the plug-in speaker receptacle.




Article number:BS-1034
Alternative products: BS-1034S, BS-634,
BS-634T


Specifications

Sensitivity (1#V, 1#n)	90 dB SPL
Frequency response	120 Hz - 20 kHz
Connection	M4 screw terminal, distance between barriers: 11 mm
Rated input (high impedance)	10 W
Tappings	100 V : 1 k Ω (10 W) / 2 k Ω (5 W) / 3.3 k Ω (3W) / 10k Ω (1 W) 70 V : 500 Ω (10 W) /1 k Ω (5 W) / 2 k Ω (2.5 W) / 3.3 k Ω (1.5 W) / 10k Ω (0.5 W)
Speaker component	Low: 12 cm cone-type, High: Balanced dome-type
Finish	HIPS resin, off-white (RAL 9010 or equivalent),


Appearance

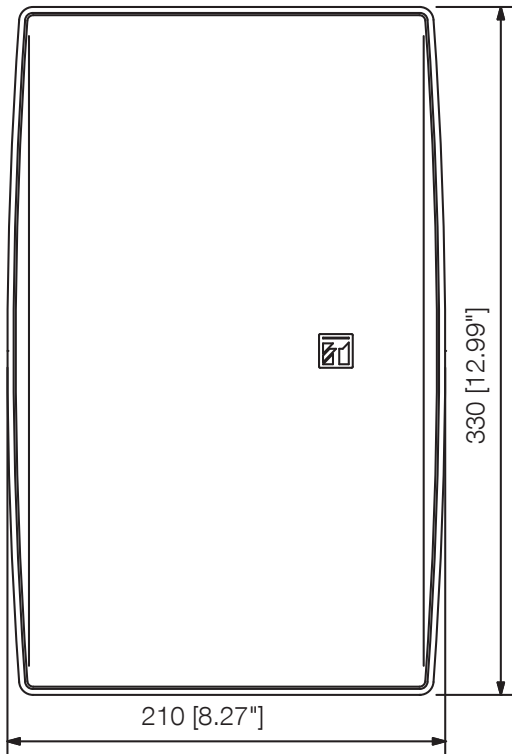

Front View

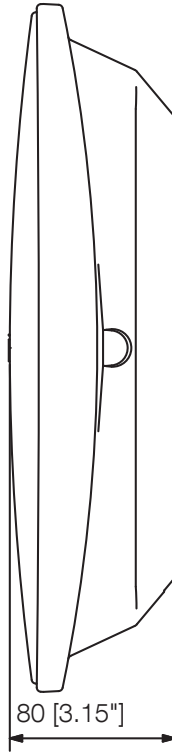

Side View

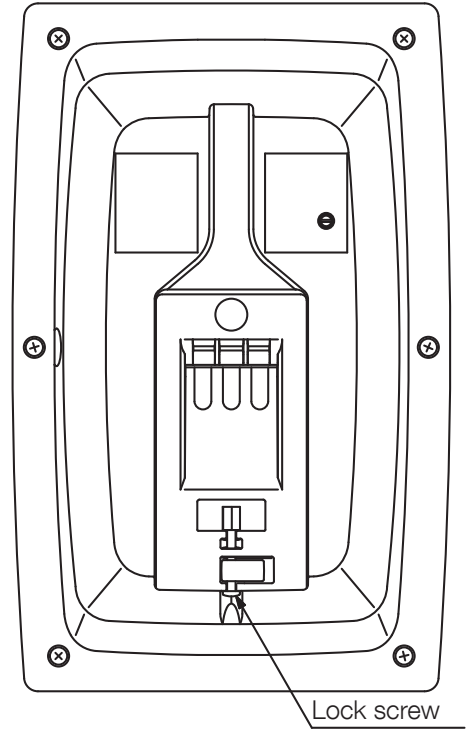

Rear View