


The BS-634T can be installed easily on the wall with help of the plug-in speaker receptacle.

---

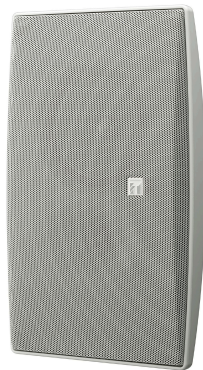

Article number:BS-634T  
 Alternative products: BS-1034, BS-1034S,  
 BS-634

---

## Specifications

Sensitivity (1#W, 1#m)	90 dB SPL
Frequency response	120 Hz - 18 kHz
Connection	On wall-mounting bracket with M4 screw terminal, distance between barriers: 11 mm
Rated input (high impedance)	6 W
Tappings	100 V line: 1.7 kΩ (6 W), 70 V line: 1.7 kΩ (3 W)
Speaker component	12 cm cone-type
Finish	HIPS resin, off-white (RAL 9010 or equivalent),

Appearance

