

The EM-700 is a low-profile, high-quality, cardioid condenser microphone suitable for installation on a lecture desk or table top in a conference room. It features optimum acoustic characteristics for sound pick-up applications when placed on a flat surface, realizing pure, natural sound quality.




Article number: EM-700

## Specifications

|                        |   |
|------------------------|---|
| Frequency response     | 35 Hz - 20 kHz                              |
| Connection             | XLR-3-12 or equivalent, Cable length: 7.5 m |
| Rated impedance        | 120 $\Omega$                                |
| Phantom power          | 9 – 52 V DC                                 |
| Frequency response     | 35 Hz - 20 kHz                              |
| Microphone type        | Boundary Microphone                         |
| Directivity            | Cardioid                                    |
| Microphone sensitivity | -33 dB (1 kHz 0 dB = 1 V/Pa)                |
| Connection             | XLR-3-12 or equivalent, Cable length: 7.5 m |
| Rated impedance        | 120 $\Omega$                                |
| Finish                 | Aluminium, die-cast, matt, paint, black,    |
| Operating temperature  | 0°C to +40°C                                |

## Appearance

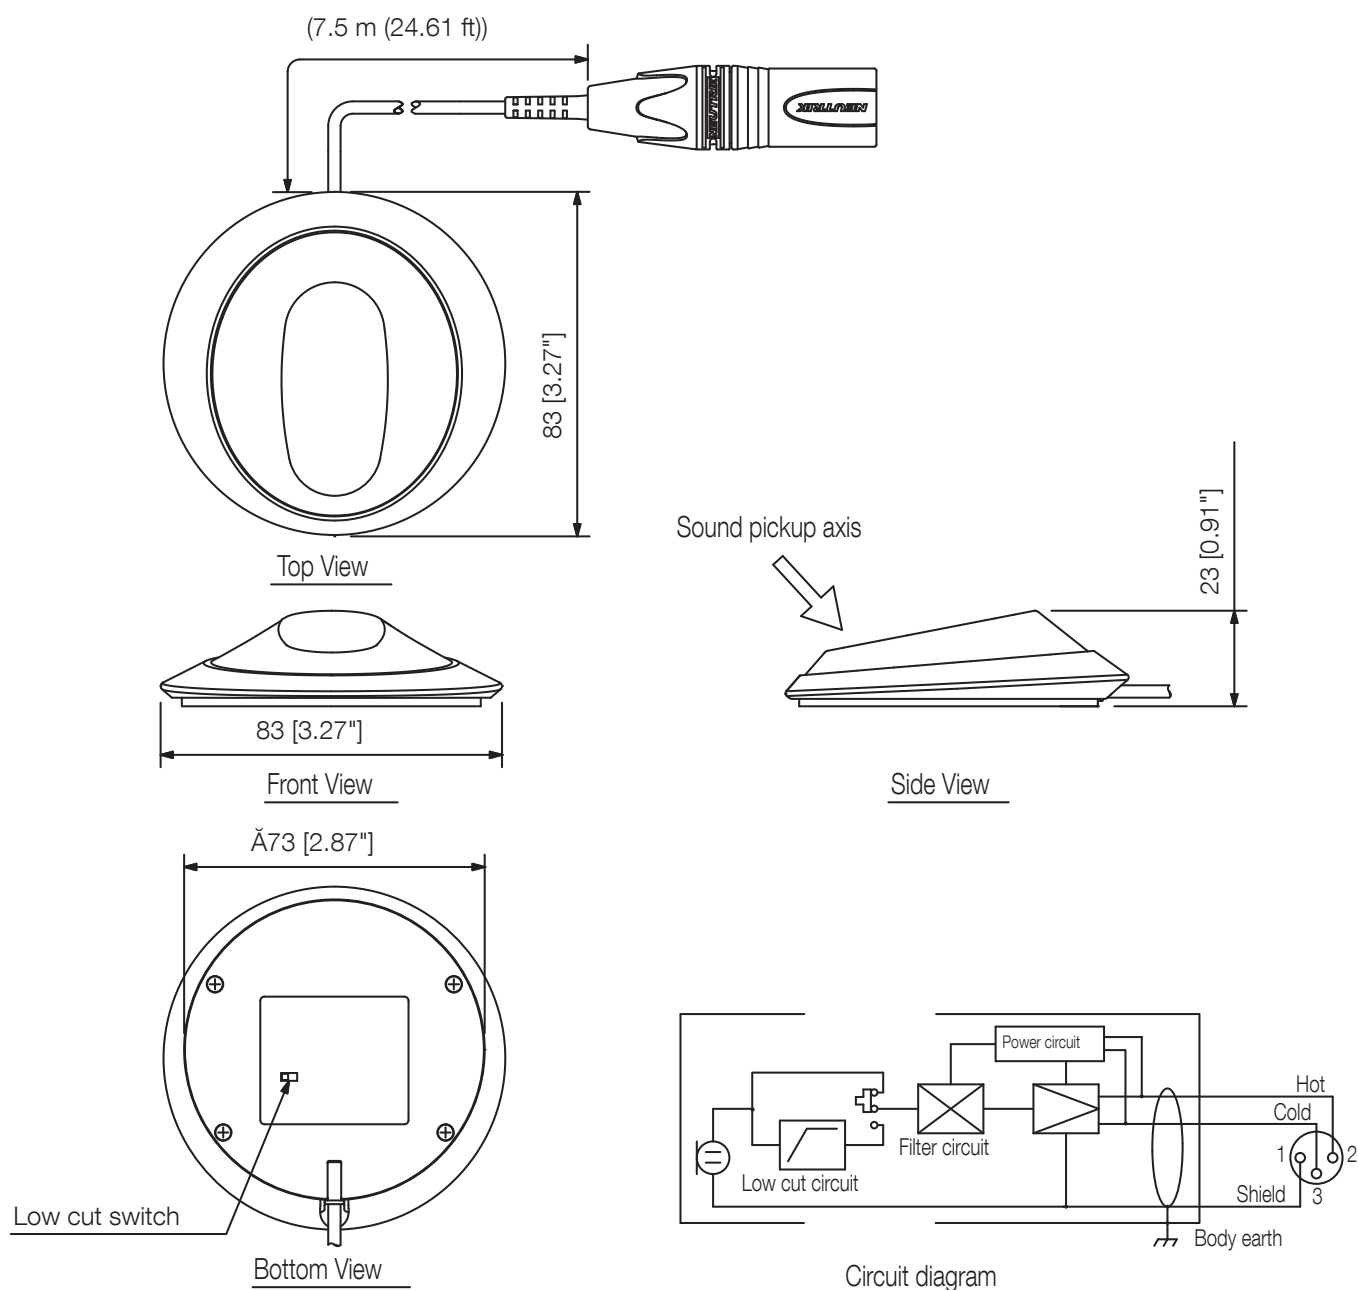

UNIT:mm

SCALE:1/2