

CY-TF65BBC (Tray for WM55B/WM65B only)			
Mechanical Spec	Dimension (mm)	Set	269.8 x 111.3 x 56.9
		Package	294 x 136 x 69
	Weight (kg)	Set	0.5
		Package	0.7
	Color		Gray White
Connectivity	Extra Connectivity Ports		USB1
			USB External (In/Out)1
			Touch Out1
			HDMI 1
Accessories	Included		USB-C 1
			Installation Guide Screws

STN-WM55R (Stand for WM55B only)			
Mechanical Spec	Dimension (mm)	Set	835 x 1632.9 x 850.6
		Package	1650 x 860 x 208
	Weight (kg)	Set	34.5
		Package	41.5
	Color		Gray White
	VESA Mount		400 X 400
Accessories	Rotation		Yes
	Included		Installation Guide
	Slim Design No Assembly Required Installation		

Samsung Flip Pro

WMB Series

Unlimited learning possibilities.

About Samsung Electronics Co., Ltd.

Samsung Electronics Co., Ltd. inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, digital appliances, medical equipment, network systems, and semiconductor and LED solutions. For the latest news, please visit the Samsung Newsroom at news.samsung.com.

Smart Signage

For more information about Samsung Smart Signage WMB Displays, visit www.samsung.com/business

Copyright © 2024 Samsung Electronics Co. Ltd. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.
416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-772, Korea



Take every learning experience to the next level

What is Flip Pro?

Introducing Samsung Flip Pro, the premium interactive display that takes learning experiences to the next level. With intuitive writing, comprehensive connectivity, smart solutions and brilliant hardware, Flip Pro provides both educators and students with boundless resources and great flexibility to create engaging learning. Experience unlimited learning possibilities with Samsung Flip Pro.

Technology highlights





Touch & Writing

- Fast & multi-touch
- Intuitive writing & drawing



Connectivity

- 3-in-1 USB-C port
- AirPlay 2
- SmartView+
- OPS mount*



Solution

- Workspace
- Boxlight MimioConnect
- Video call application
- Remote content push



Hardware

- 4Ch. 40W speaker*
- Ambient light sensor*
- Front panel*
- Rear handle*
- Antimicrobial Coating
- Shatterproof film



* Each feature may vary by model.

Touch & Writing

Latency


26ms

Sensing Level

2,048

Multi-touch

20

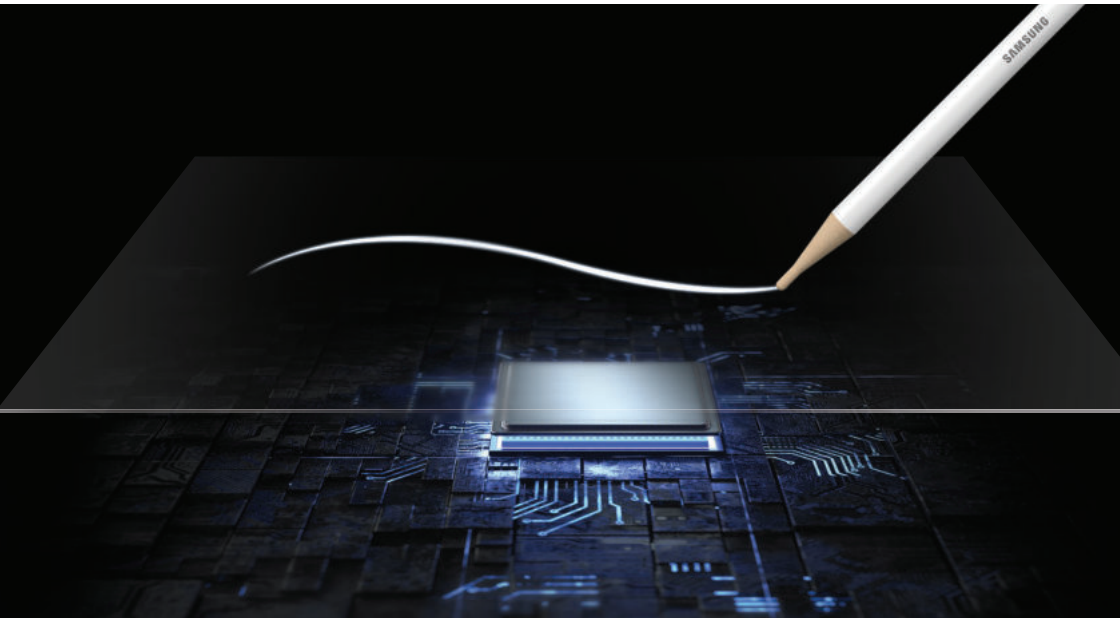


Fast & multi-touch

Better interaction with best-in-class multi-touch


Samsung Flip Pro creates a realistic, smooth writing and drawing experience with touch technology with 26ms* latency and 2,048 points of thickness built directly into the display. Industry-best touch latency was achieved by Samsung's proprietary prediction logic which analyzes user's writing patterns. Plus, Flip Pro enables multi-touch for up to 20 people for enhanced interactivity.

* When using single touch.



Triceratops
Triceratops has been documented since the genus was first described in 1899 by Othniel Charles Marsh.


GARR!




Pen & brush mode



Flexible erasing



Quick tool & palette menu




Easy note layer

Intuitive writing & drawing

Bring ideas to life in an instant

Ideas are brought to life instantly on Flip Pro with an intuitive user interface. Samsung Flip's unique pen and brush mode provides a real-world writing experience with various options, while flexible erasing requires just a swipe of your finger or palm. The quick tool and palette menu ensure creativity flows and toggle button easily enables a new note layer UI.


* All images are simulated for illustrative purposes.

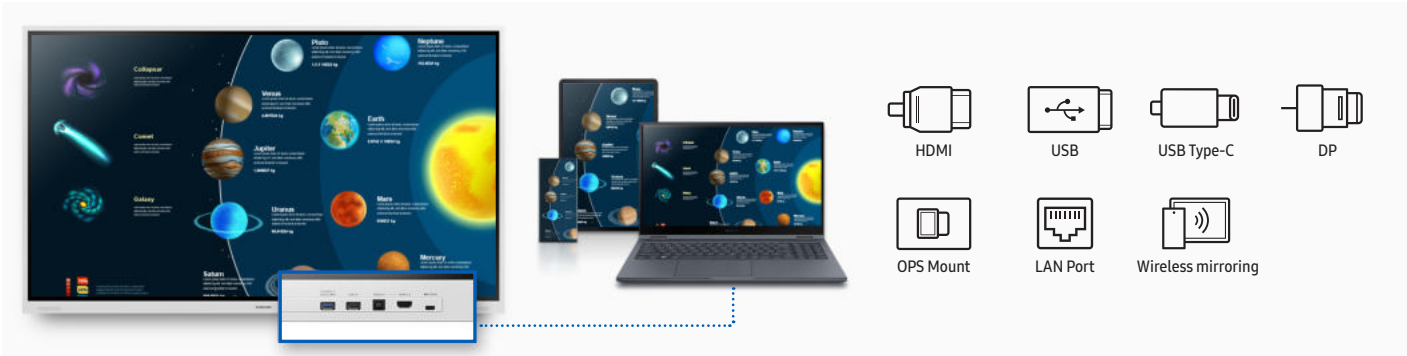

Versatile connectivity
Stay connected from any source

Flip Pro provides multiple connectivity options, including USB, HDMI, DP and OPS mount*. Educators can easily connect any device to access content and display information on a larger screen, as well as connect to any network and other devices through LAN port and wireless screen-mirroring.


* OPS mount is currently only available on WM75B and WM85B. Type-C port only available on Tray. Accessory Tray must be purchased separately at WM855/65.

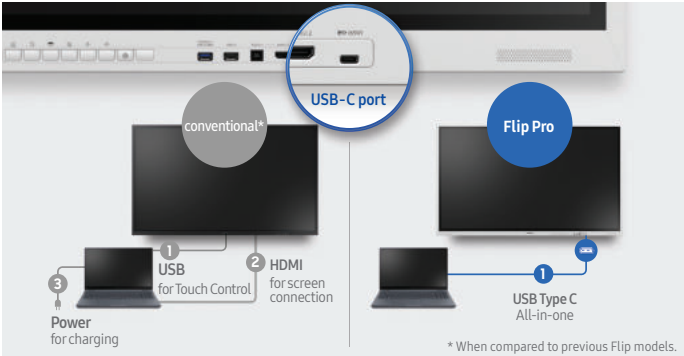

3-in-1 USB-C port
One single port for three functions

Connectivity is enhanced with three-in-one USB Type-C connectivity, enabling screen mirroring, touch control and external device charging (max. 65W)*, allowing educators to deliver interactive and engaging lessons without any hassle.

* Power delivery varies by model.

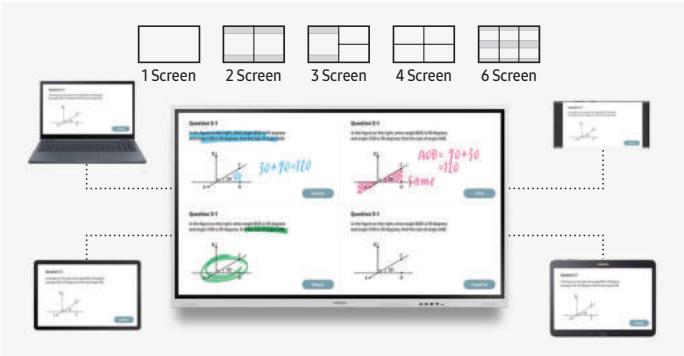

SmartView+
Smart, wireless sharing from multiple devices

With SmartView+, up to 50 devices can be simultaneously connected to the interactive display wirelessly, in addition to enabling multi-view on up to 6 screens, ideal for larger meeting rooms as well as digitized classrooms.



AirPlay 2
Share with AirPlay 2


Flip Pro is integrated with AirPlay 2, allowing educators and students to present on the big screen, increasing visibility and engagement in larger spaces, while ensuring no student misses out on important information.



OPS Mount
Use your favorite third-party education solutions

With OPS(Open Pluggable Specification) mount*, Flip Pro enables educators to use their third-party education solutions, allowing them to deploy school information systems(SIS), learning apps and tools.

* Sold separately.
** OPS mount is currently only available on WM75B and WM85B.

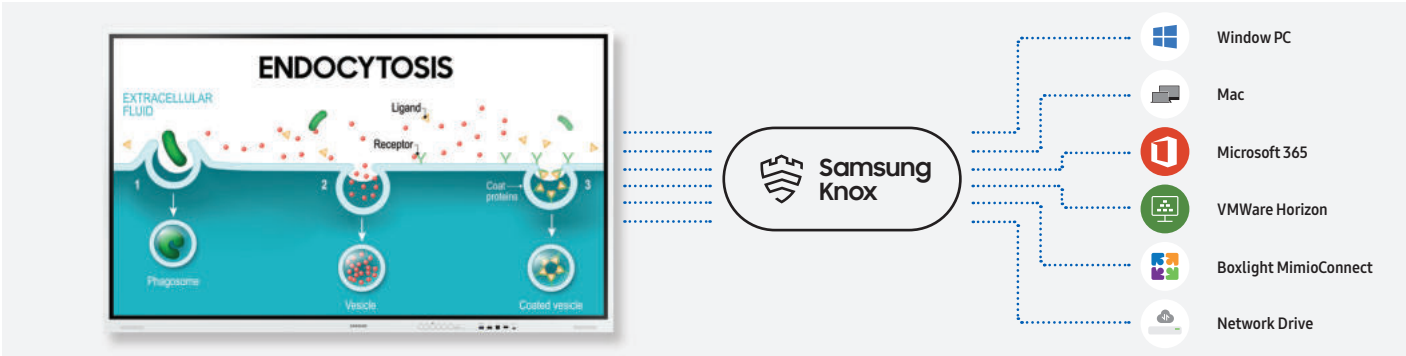

Workspace
Access whatever you need, from anywhere

With Workspace secured by Knox, Flip Pro enables users to easily access remote PC, network drive and other third-party applications such as Microsoft 365, VMWare, Boxlight MimioConnect and video call applications*. This ensures efficiency from any location and an uninterrupted workflow for educators and students.


* Available apps may vary by region and require service subscription.



Boxlight MimioConnect
Optimize lesson planning with embedded learning solution

Flip Pro offers the MimioConnect* app, an online blended learning platform, providing an extensive catalog of versatile learning content.


* Service availability varies by region and requires Boxlight subscription.

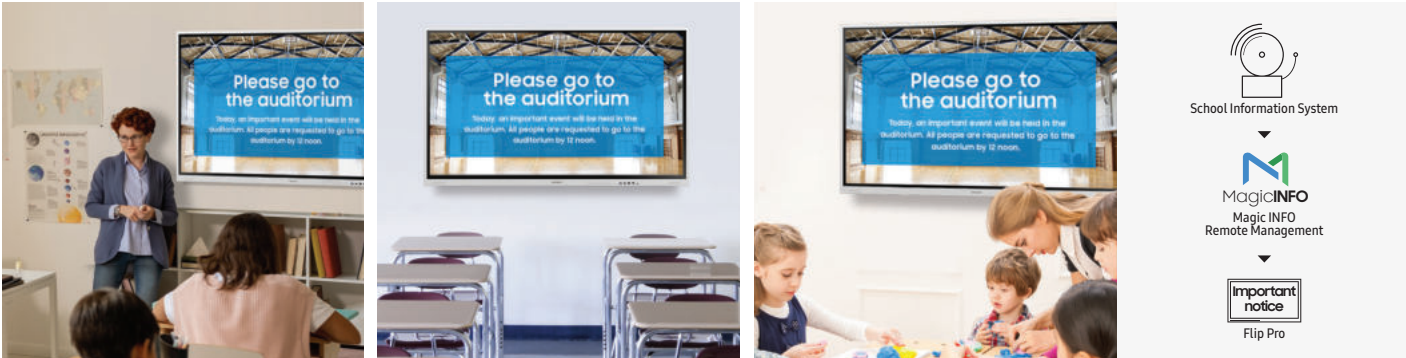

Remote content push
Keep informed with remote management solution

Using Samsung's MagicINFO Remote Management solution*, Flip Pro offers new functionality that pushes content, alerts and warnings from the school information system to the display, notifying teachers and students of important updates which can be pushed directly to Flip displays in every classroom.

* Requires MagicINFO license to use this service and SIS(School Information Service) should be separately built and integrated with MagicINFO.

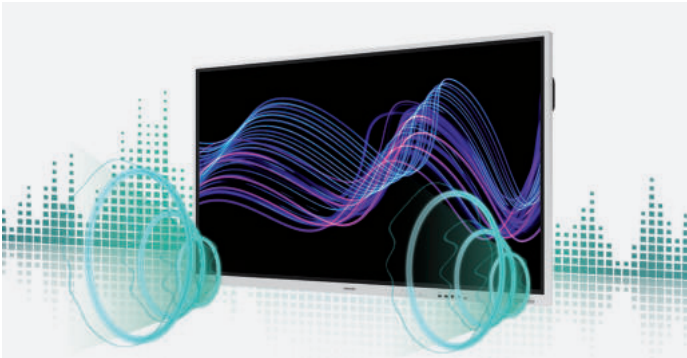

4.0Ch. 40W speaker
Engage learners with immersive sound

Flip Pro offers powerful 4-channel 40-watt speakers* front and backside to enhance students’ listening experience, so they are more immersed in content when both watching and listening.

* Speaker option varies by model.



Front panel
Access frequently used menu directly

Use functions and hotkeys faster and easier. Flip Pro puts the buttons that users most frequently use on the front panel* so they can access more easily and intuitively.

* Built-in front panel is currently only available on WM75B and WM85B.



Ambient light sensor
Enjoy optimal content in any lighting conditions

The screen of Flip Pro is equipped with an ambient light sensor* to adjust the brightness according to lighting conditions. Whether the classroom is bright or dark, content can be enjoyed to the fullest.

* Ambient light sensor is currently only available on WM75B and WM85B.



Rear handle
Easy moving. Less effort.

Move the Flip Pro display freely anywhere in the classroom. The rear handle helps teachers move the large display easily with little effort*.

* Requires separate standing mount to move which must be purchased separately.
* Rear handle is currently only available on WM75B and WM85B.



Protective screen technology
Clean screen and minimized damage risk

Samsung Flip Pro delivers peace of mind with a built-in Antimicrobial Coating* which inhibits microbial growth. Plus, the Flip’s display is wrapped in a proprietary shatterproof film, ensuring the screen stays intact in the event of a break.

* To perform its antibacterial function, this product has been treated with the biocidal substance Silver phosphate glass.
* Antibacterial property does not protect users against bacteria and provides no protection against viruses including Covid-19.
* Antimicrobial Coating is on surface of screen only and the effect may vary depending on conditions of use.
* For further details regarding regional restrictions on the antibacterial function, please refer to each country’s Samsung.com website.

Versatility for various purposes, in any space

Samsung Flip Pro is available in a variety of sizes to suit any space in both corporate environments and education especially. Regardless of the size of a space, number of people or use case, Flip Pro is an optimal solution for users looking to enhance efficiency and creativity.

Corporate



Huddle room - WM55B



Mid-sized meeting room - WM65B



Boardroom - WM75B / WM85B

Education



Small classroom- WM55B



Mid-sized classroom - WM65B



Auditorium - WM75B / WM85B

Specifications

Model			WM55B	WM65B
Panel	Diagonal Size		55"	65"
	Type		New Edge, 60Hz	New Edge, 60Hz
	Resolution		3,840 x 2,160 (Landscape)	3,840 x 2,160 (Landscape)
	Brightness(Typ.)		350cd/m2 (without glass)	350cd/m2 (without glass)
	Contrast Ratio(Typ.)		4000:1 (Typ.)(without glass)	4000:1 (Typ.)(without glass)
	Viewing Angle(H/V)		178:178	178:178
Sound	Response Time(G-to-G)		8ms(Typ.)	8ms(Typ.)
	Speaker Type		Built in Speaker (10W x 2CH)	Built in Speaker (10W x2CH)
Connectivity	INPUT	RGB	N/A	N/A
		VIDEO	(Basic) HDMI 1, DP1, (With Tray) HDMI 1, USB-C	(Basic) HDMI 1, DP1, (With Tray) HDMI 1, USB-C
		AUDIO	N/A	N/A
		USB	(Basic) USB 1, (With Tray) USB 2, USB External (In/Out) 1	(Basic) USB 1, (With Tray) USB 2, USB External (In/Out) 1
	OUTPUT	RGB	N/A	N/A
		VIDEO	N/A	N/A
		AUDIO	1(Stereo Mini Jack)	1(Stereo Mini Jack)
		Touch Out	(Basic) Touch Out 1 (USB Upstream Type), (With Tray) Touch Out 1 (USB Upstream Type)	(Basic) Touch Out1 (USB Upstream Type), (With Tray) Touch Out 1
	INTERNAL	SENSOR	N/A	N/A
	EXTERNAL	CONTROL	Touch Input RS232C thru stereo jack, RJ45(For MDC)	Touch Input RS232C thru stereo jack, RJ45(For MDC)
Touch	BT/WiFi		Yes (Keyboard/Mouse,speaker)	Yes (Keyboard/Mouse,speaker)
	Type		IR	IR
	# of Drawing		20 touch (internal/external) * Whiteboarding app works 4 drawing	20 touch (internal/external) * Whiteboarding app works 4 drawing
	Touch Pen Type		Passive Pen with magnet	Passive Pen with magnet
	Object Recognition Range		2mm/ 4mm / 8mm / 50mm (Brush Mode : Dynamic Object Recognition)	2mm/ 4mm / 8mm / 50mm (Brush Mode : Dynamic Object Recognition)
	Touch Response Time		6.7ms	6.7ms
	Drawing Speed (Touch latency)		26ms	26ms
	Haze		8%~12%	8%~12%
	Thickness		2.85T	3.2T
	Hardness		Heat Semi-Strengthened Glass	Heat Semi-Strengthened Glass
	Additional Film		AG Flim(Anti glare)	AG Flim(Anti glare)
			Hydrophobic Coated PET (Shatter-proof flim) Antimicrobial Coating	Hydrophobic Coated PET (Shatter-proof flim) Antimicrobial Coating
Power	Type		Internal	Internal
	Power Supply		AC100-240V 50/60Hz	AC100-240V 50/60Hz
	Power Consumption	Max[W/h]	154W(100-240V)	192.5W(100-240V)
		Typical[W/h]	95W	124W
		Rating[W/h]	140W	175W
		Stand-by[W/h]	0.5	0.5
		BTU[W/h]	525.14W	656.425W
	Dimension (mm)	Set	1297.4 x 768.2 x 59.9	1522.4 x 897.6 x 62.9
		Package	1464 x 915 x190	1691 x 1055 x 198
		Weight (kg)	Set	28.6
Package	35.9		48.2	
Mechanical Spec	Color		Gray White	Gray White
	VESA Mount		400 * 400	400 * 400
	Protection Glass		Yes	Yes
	Stand Type		Stand / Wallmount (STN-WM55R / WMN4277SF)	Wallmount (WMN-WN65R)
	Media Player Option Type		N/A	N/A
	Rotation		Landscape & Portrait	Landscape & Portrait
	Power Cable Length		3M /2.4M(US)	3M /2.4M(US)
	Accessory		Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Warranty/QSG	Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black) Warranty/QSG
	Operating Temperature		0°C~ 40°C	0°C~ 40°C
	Humidity		10 ~ 80%, non-condensing	10 ~ 80%, non-condensing
Operation	Key		Flip App	Flip App
	Orientation		Landscape / Portrait	Landscape / Portrait
	H/W		Touch module(IR), Built in Speaker(20W 2CH), WiFi/BT Module Embedded	Touch module(IR), Built in Speaker(20W 2CH), WiFi/BT Module Embedded
Feature	S/W	First screen	Flip S/W (whiteboarding app)	Flip S/W (whiteboarding app)
		Apps	Document viewer	Document viewer
			SmartView+	SmartView+
			Video player	Video player
			Web browser	Web browser
			Workspace	Workspace
			(RDP/VNC, Microsoft 365, VMWare)	(RDP/VNC, Microsoft 365, VMWare)
			Edu tool	Edu tool
			mimioconnect(N.America Only)	mimioconnect(N.America Only)
		WebRTC	Yes	Yes
		Upgradable web engine	Yes	Yes
	SmartView+	Yes	Yes	
Airplay	Yes	Yes		
Internal Player (Embedded H/W)	Platform	Pontus-M (Tizen 6.5)	Pontus-M (Tizen 6.5)	
	Processor	CA72 Quad(1.7GHz)	CA72 Quad(1.7GHz)	
	Storage	32GB (2.65GB Occupied by O/S, 29.35GB Available)	32GB (2.65GB Occupied by O/S, 29.35GB Available)	
	Operating System	Tizen 6.5 : Samsung Proprietary OS(VDLinux)	Tizen 6.5 : Samsung Proprietary OS(VDLinux)	
Accessories	Security		802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP	802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP
	Included		Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Warranty/QSG	Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Warranty/QSG
	Optional	Stand	STN-WM55R	N/A (3rd party company stand can be supported through VESA)
		Mount	WMN-4277SF	WMN-WM65R
		OPS Mount	-	-
Tray		CY-TF65BBC	CY-TF65BBC	
3rd party compatibility			Logitech RallyBar Plus	Logitech RallyBar Plus

Model			WM75B	WM85B	
Panel	Diagonal Size		75"	85"	
	Type		New Edge, 60Hz	New Edge, 60Hz	
	Resolution		3,840 x 2,160 (Landscape)	3,840 x 2,160 (Landscape)	
	Brightness(Typ.)		350cd/m2 (without glass)	350cd/m2 (without glass)	
	Contrast Ratio(Typ.)		4000:1 (Typ.)(without glass)	4000:1 (Typ.)(without glass)	
	Viewing Angle(H/V)		178-178	178-178	
Sound	Response Time(G-to-G)		8ms(Typ.)	8ms(Typ.)	
	Speaker Type		Built in Speaker (10W x 4CH)	Built in Speaker (10W x 4CH)	
Connectivity	INPUT	RGB	N/A	N/A	
		VIDEO	HDMI 2(Rear1, Front1), DP1, USB C(Front), OPS I/F	HDMI 2(Rear1, Front1), DP1, USB C(Front), OPS I/F	
		AUDIO	N/A	N/A	
		USB	2(For SoC, Rear/Front), 1 (for external 3.0x1(Front))	2(For SoC, Rear/Front), 1 (for external 3.0x1(Front))	
	OUTPUT	RGB	N/A	N/A	
		VIDEO	N/A	N/A	
		AUDIO	1(Stereo Mini Jack)	1(Stereo Mini Jack)	
		Touch Out	Touch Out 2 (USB Upstream Type, Front 1, Rear1)	Touch Out 2 (USB Upstream Type, Front 1, Rear1)	
	INTERNAL	SENSOR	N/A	N/A	
	EXTERNAL	CONTROL	Touch Input RS232C thru stereo jack, RJ45(For MDC)	Touch Input RS232C thru stereo jack, RJ45(For MDC)	
Touch	BT/WiFi		Yes (Keyboard/Mouse, Speaker)	Yes (Keyboard/Mouse,speaker)	
	Type		IR	IR	
	# of Drawing		20 touch (internal/external) * Whiteboarding app works 4 drawing	20 touch (internal/external) * Whiteboarding app works 4 drawing	
	Touch Pen Type		Passive Pen with magnet	Passive Pen with magnet	
	Object Recognition Range		2mm/ 4mm / 8mm / 50mm (Brush Mode : Dynamic Object Recognition)	2mm/ 4mm / 8mm / 50mm (Brush Mode : Dynamic Object Recognition)	
	Touch Response Time		6.7ms	6.7ms	
	Drawing Speed (Touch latency)		26ms	26ms	
	Haze		8%~12%	8%~12%	
	Thickness		3.2T	3.2T	
	Hardness		Heat Semi-Strengthened Glass	Heat Semi-Strengthened Glass	
	Additional Film		AG Flim(Anti glare)	AG Flim(Anti glare)	
			Hydrophobic Coated PET (Shatter-proof flim) Antimicrobial Coating	Hydrophobic Coated PET (Shatter-proof flim) Antimicrobial Coating	
Power	Type		Internal (Main 1ea, OPS 1ea)	Internal (Main 1ea, OPS 1ea)	
	Power Supply		AC100-240V 50/60Hz	AC100-240V 50/60Hz	
	Power Consumption	Max[W/h]	473W(100-240V), 451W(220-240V), OPS(16V/4.5A)	528W(100-240V), 506W(220-240V), OPS(16V/4.5A)	
		Typical[W/h]	187W	197W	
		Rating[W/h]	430W(100-240V), 410W(220-240V), OPS(16V/4.5A)	480W(100-240V), 460W(220-240V), OPS(16V/4.5A)	
		Stand-by[W/h]	0.5	0.5	
Mechanical Spec	Dimension (mm)	BTU[W/h]	1612.93W(100-240V), 1537.91W(220-240V), OPS(16V/4.5A)	1800.48W(100-240V), 1725.46W(220-240V), OPS(16V/4.5A)	
		Set	1724 x 1026.3 x 89	1945.8 x 1151.1 x 89	
		Package	1905 x 1189 x 287	2136 x 1318 x 260	
	Weight (kg)	Set	59.3	75.2	
		Package	72.2	91.6	
		Color	Gray White	Gray White	
	VESA Mount		400 * 400	600 * 400	
	Protection Glass		Yes	Yes	
	Stand Type		Wall Mount	Wall Mount	
	Media Player Option Type		OPS Slot support	OPS Slot support	
	Rotation		Landscape only	Landscape only	
	Power Cable Length		3M /2.4M(US)	3M /2.4M(US)	
	Operation	Accessory		Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Warranty/QSG	Power Cord, USB Upstream Cable(1ea), Pen(2ea, Black), Warranty/QSG
		Operating Temperature		0°C~ 40°C	0°C~ 40°C
Humidity		10 ~ 80%, non-condensing	10 ~ 80%, non-condensing		
Feature	Key		Flip App	Flip App	
	Orientation		Landscape	Landscape	
	H/W		Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded	Touch Overlay(IR), Front Connectivity, OPS I/F Support(w/OPS Box) Built in Speaker(40W 4CH), WiFi/BT Module Embedded	
	S/W	First screen	Flip S/W (whiteboarding app)	Flip S/W (whiteboarding app)	
		Apps	Document viewer	Document viewer	
			SmartView+	SmartView+	
			Video player	Video player	
			Web browser	Web browser	
			Workspace	Workspace	
			(RDP/VNC, Microsoft 365, VMWare)	(RDP/VNC, Microsoft 365, VMWare)	
			Edu tool	Edu tool	
			mimioconnect(N.America Only)	mimioconnect(N.America Only)	
		WebRTC	Yes	Yes	
	Upgradable web engine	Yes	Yes		
	SmartView+	Yes	Yes		
Airplay	Yes	Yes			
Internal Player (Embedded H/W)	Platform	Pontus-M (Tizen 6.5)	Pontus-M (Tizen 6.5)		
	Processor	Cortex A72 1.7GHz Quad-Core CPU 2MB L2	Cortex A72 1.7GHz Quad-Core CPU 2MB L2		
	Storage	32GB (2.65GB Occupied by O/S, 29.35GB Available)	32GB (2.65GB Occupied by O/S, 29.35GB Available)		
	Operating System	Tizen 6.5 : Samsung Proprietary OS(VDLinux)	Tizen 6.5 : Samsung Proprietary OS(VDLinux)		
	Security			802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP	
Accessories	Included		Power Cord, USB Upstream Cable(1ea), Pen(2ea), Warranty/QSG	Power Cord, USB Upstream Cable(1ea), Pen(2ea), Warranty/QSG	
	Optional	Stand	N/A (3rd party company stand can be supported through VESA)	N/A (3rd party company stand can be supported through VESA)	
		Mount	WMN6575SE	WMN8200SF	
		OPS Mount	CY-PBRK200	CY-PBRK200	
		Tray	-	-	
3rd party compatibility			Logitech RallyBar Plus	Logitech RallyBar Plus	