

## Product Specifications

### FONE540

- Wireless Bluetooth / USB Wired for PC
- Full duplex microphone array speakerphone
- Two omnidirectional microphones support 360° pickup
- Full duplex echo cancellation
- Advanced noise suppression
- Powerful wideband voice processing
- Speaker volume: adjustable to 90 dB SPL at 0.5 m
- 3.5 mm line-in (aux) cable connects BYOD smartphones or PCs to use as speakerphones
- Touch controls for volume down/up, mute, phone input, call, and hang up
- Can bridge phone-in and USB into one call

### USB

- Micro USB 2.0
- USB Audio Class (UAC) 1.0

### Hardware Specifications

- Processor: 3.2 GHz Intel® Core™ i5-4460 or later
- 4 GB RAM
- USB port

### Security

- Kensington slot

### System Requirements

- Windows® 7/10 or later
- Mac OS X v10.13 or later
- Google Chromebook™ version 76.0.3809.102 or later
- Android™ 6 or later

\*Please register online to receive a free 2-year warranty extension. For detailed warranty information, please contact an AVer representative.  
\*\*Specifications may vary depending on location and are subject to change without notice.

### Connectivity

- 12V power adapter
- Micro USB connector
- LAN for IP remote access
- Expansion port (daisy-chain speakerphone or microphone)
- 3.5 mm phone-in jack
- 3.5 mm line out

### Control

- UAC, plug and play
- Web UI: browser IP access via Chrome™ browser (Internet Explorer not supported)
- PTZApp

### Environmental Data

- Operation temperature: 0°C to 40°C
- Operation humidity: 20% to 80%
- Storage temperature: -20°C to 60°C
- Storage humidity: 20% to 80%

### Dimensions

- Package dimensions: 259 x 259 x 171 mm
- Package weight: 1.93 kg
- Speakerphone: 220 x 181.5 x 49.5 mm/0.85 kg

### Package Contents

- Speakerphone unit
- Power adapter
- Micro USB 2.0 to Type-A cable (16 ft/5 m)
- 3.5 mm aux cable (3 ft/0.9 m)
- Warranty card
- Quick Start Guide

### Power Supply

- AC 100V to 240V, 50/60 Hz
- Consumption: 12V, 5A

### Free Applications for Meeting Collaboration (for Windows® and Mac Devices)

- PTZApp
  - Upgrade firmware automatically or manually
  - Diagnose operating status
- EZLive
  - Real-time streaming / annotating / snapshots / video recording

### Optional Accessories

- Expansion speakerphone (10 m cable included), daisy-chain up to three speakerphones
- Two expansion microphones (two 5 m cables included), daisy-chain up to four microphones

### Warranty\*

- Camera/Speakerphone: 3+2 years
- Accessories: 1 year

### Compatible Applications

Zoom, Microsoft® Teams, Skype for Business, WebRTC, Google Meet™, BlueJeans, Wirecast, Adobe® Connect™, Skype, vMix, GoToMeeting™ RingCentral, TrueConf, Cisco Webex®, LiveOn, XSplit, Vidyo, V-Cube, Microsoft® Lync™, Fuze, CyberLink U Meeting®, Intel® Unite™

## Product Appearance

Front



Back



©2021 AVer Information Inc. All rights reserved.  
All brand names and logos are trademarks of their respective companies.

www.aver.com



Distributor/Dealer

202107



# FONE540

Loa hội nghị truyền hình



Kết nối linh hoạt



Công nghệ khử nhiễu



Phát hiện đàm thoại đôi (Double-Talk)



Các cuộc gọi 3 chiều



Đèn Led ở mỗi nút tính năng



Kết nối không dây

# Lý tưởng trong các phòng họp trực tuyến với mọi

kích thước, FONE540 là một hệ thống loa và micro có thể mở rộng và kết nối qua cổng USB giúp nâng cao trải nghiệm âm thanh hội nghị của bạn trong mọi không gian làm việc từ cá nhân, phòng họp nhóm và phòng hội nghị vừa đến lớn. Dễ dàng cài đặt và sử dụng, FONE540 cung cấp âm thanh rõ ràng chuyên nghiệp với chất lượng tuyệt vời theo tiêu chuẩn toàn cầu.




## Mở rộng thêm Loa / Mic để đáp ứng với nhiều không gian họp trực tuyến khác nhau

Được tích hợp công nghệ chuỗi nối dài, FONE540 có thể được mở rộng bằng cách thêm tối đa hai loa ngoài để nâng cấp phạm vi phủ sóng đầy đủ bao quát trong tất cả các loại phòng. Cả mic và loa cũng có thể được mở rộng thêm vào hệ thống, khiến nó trở thành sự lựa chọn hoàn hảo trong mọi không gian phòng họp trực tuyến.



## Công nghệ khử nhiễu nâng cao giúp trải nghiệm âm thanh tuyệt vời

Bạn cảm thấy khó chịu với âm thanh gõ bàn phím và âm thanh điều hòa không khí trong cuộc gọi hội nghị truyền hình? FONE540 khử tiếng ồn và đảm bảo âm thanh rõ ràng chưa từng có, giúp bạn không bị phân tâm.

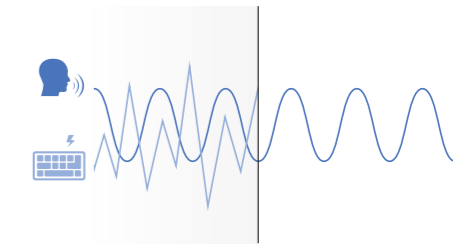

## Âm thanh hoàn hảo cho giao tiếp linh hoạt

Những người ở phía bên kia của cuộc họp âm thanh hội nghị vẫn khó nghe từng từ bạn nói? Với FONE540, bạn sẽ không phải gặp lại vấn đề này nữa. Được trang bị tính năng phát hiện đàm thoại đôi (double-talk), FONE540 khiến mọi cuộc gọi giống như một cuộc trò chuyện trực tiếp.



## Bên thứ ba có thể tham gia mọi lúc, mọi nơi

Loa hội nghị FONE540 dễ dàng kết nối các cuộc gọi ba chiều. Bên thứ ba có thể tham gia đơn giản bằng cách gọi đến điện thoại được kết nối với FONE540 bằng jack cắm đầu vào 3,5 mm. Đó là một cách đơn giản nhưng hiệu quả để ba bên tận hưởng một cuộc họp trực tuyến với chất lượng âm thanh vượt trội.



## Đèn báo thông minh hiển thị rõ ràng

Không cần lo lắng về việc mọi người trong cuộc họp có biết FONE540 đang bật hay tắt, tắt tiếng hay không hoạt động. Các đèn LED chỉ báo thông minh cho phép mọi người ở mọi góc trong phòng xác định trạng thái của loa hội nghị.

